

NATIONAL COMFORT PRODUCTS

HEATING & AIR CONDITIONING EQUIPMENT

COMFORT-PACK ELECTRIC HEATING • ELECTRIC COOLING

“CPE” SERIES

FEATURES

- Totally Self-Contained Heating & Cooling Units
- 1 Ton thru 2½ Ton Capacity Cooling
- Up to 51,000 BTUH Heating Capacity Output
- No Long Refrigerant Lines
- Completely Precharged and Prewired
- Separately Metered
- Cleaner Appearance
- Slide Out Cooling Chassis
- Easier Installation

COOLING SYSTEM

- High Efficiency Compressor
- Rifled Copper Tube with Enhanced Aluminum Fin Coils
- Permanently Lubricated High Efficiency PSC Blower Motor

HEATING SYSTEM

- Up to 15KW Electric Resistance Heat




HEATING & AIR CONDITIONING EQUIPMENT

"CPE" SERIES

COMFORT PACK ELECTRIC HEATING - ELECTRIC COOLING

PERFORMANCE DATA

MODEL	COOLING BTUH	HEATING BTUH @ 230V	SEER	HEATING KW	SHIP WT.
CPE1205-A	12,000	17,000	9.7	5	325
CPE1210-A	12,000	34,000	9.7	10	325
CPE1805-A	18,000	17,000	9.7	5	325
CPE1810-A	18,000	34,000	9.7	10	325
CPE1815-A	18,000	51,000	9.7	15	325
CPE2405-A	23,600	17,000	9.7	5	350
CPE2410-A	23,600	34,000	9.7	10	350
CPE2415-A	23,600	51,000	9.7	15	350
CPE3010-A	28,000	34,000	9.7	10	360
CPE3015-A	28,000	51,000	9.7	15	360

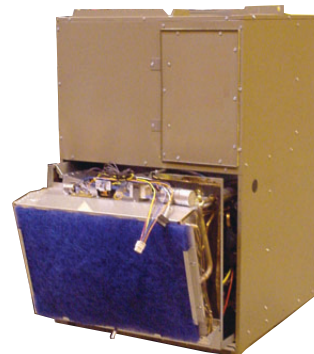

ELECTRICAL DATA


MODEL	VOLTAGE	COMPRESSOR		INDOOR BLOWER MOTOR		OUTDOOR FAN MOTOR		TOTAL AMPS	MINIMUM CIRCUIT AMPACITY	MAXIMUM OVERCURRENT PROTECTOR
		RLA	LRA	HP	FLA	HP	FLA			
CPE1205-A	208-230/60/1	4.6	33	1/3	2.3	1/4	1.5	24.2	30.3	35
CPE1210-A	208-230/60/1	4.6	33	1/3	2.3	1/4	1.5	45.0	57.5	60
CPE1805-A	208-230/60/1	9.6	47	1/3	2.3	1/4	1.5	24.2	30.3	35
CPE1810-A	208-230/60/1	9.6	47	1/3	2.3	1/4	1.5	46.0	57.5	60
CPE1815-A	208-230/60/1	9.6	47	1/3	2.3	1/4	1.5	67.8	84.6	90
CPE2405-A	208-230/60/1	11.8	59	1/3	2.3	1/4	1.8	24.2	30.3	35
CPE2410-A	208-230/60/1	11.8	59	1/3	2.3	1/4	1.8	46.0	57.5	60
CPE2415-A	208-230/60/1	11.8	59	1/3	2.3	1/4	1.8	67.8	84.6	90
CPE3010-A	208-230/60/1	14.1	73	1/3	2.3	1/4	1.8	46.0	57.5	60
CPE3015-A	208-230/60/1	14.1	73	1/3	2.3	1/4	1.8	67.8	84.6	90

BLOWER PERFORMANCE


Model	Blower Speed	CFM @ External Static Pressure (wet coil & filter)			
		0.2	0.3	0.4	0.5
CPE 12,18,24,30	Low	615	575	540	495
	Medium	670	620	585	545
	High	745	690	640	590

Optional Accessories


Part Number	Description
CPLG	Louvered Grill
CPWS	Wall Sleeve
CPWSA	Wall Sleeve Adapter

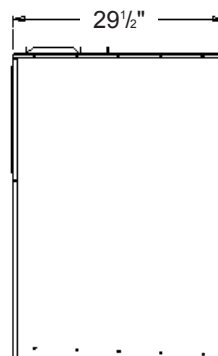

SIDE VIEW



TOP VIEW

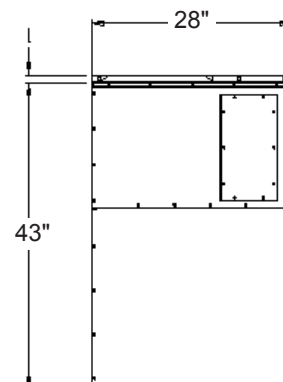

FRONT VIEW



HEATING & AIR CONDITIONING EQUIPMENT

Note: All Specifications are subject to change without notification.

539 Dunksferry Road
Bensalem, PA 19020
(800) 523-7138 • FAX: (215) 244-9579
www.nationalcomfortproducts.com