

NATIONAL COMFORT PRODUCTS

HEATING & AIR CONDITIONING EQUIPMENT

COMFORT-PACK ELECTRIC HEATING - ELECTRIC COOLING

"CPE" SERIES

FEATURES

- Totally Self-Contained Heating & Cooling Units
- 1 Ton thru 2½ Ton Capacity Cooling
- Up to 51,000 BTUH Heating Capacity Output
- Easy Access Service Ports
- Completely Precharged and Prewired
- Totally Polarized Electrical Plug Connections on Cooling Chassis
- No Long Refrigerant Lines
- Separately Metered
- Cleaner Appearance
- Slide Out Cooling Chassis
- Easier Installation
- Factory Installed 1" Filter and Rack

COOLING SYSTEM

- High Efficiency Compressor
- Rifled Copper Tube with Enhanced Aluminum Fin Coils
- Permanently Lubricated High Efficiency PSC Blower Motor

HEATING SYSTEM

- Up to 15KW Electric Resistance Heat
- Fast-Acting Open Wire Elements
- Internal Automatic Reset Thermal Limits
- One-Stage Heat Control with Sequenced Steps
- Internal Fusing

"CPE" SERIES

COMFORT PACK

ELECTRIC HEATING - ELECTRIC COOLING

PERFORMANCE DATA

MODEL	COOLING BTUH	HEATING BTU @ 230V	SEER	HEATING KW	SHIP WT.
CPE1205-B	12,000	17,000	10.6	5	315
CPE1210-B	12,000	34,000	10.6	10	315
CPE1805-B	18,000	17,000	10.6	5	325
CPE1810-B	18,000	34,000	10.6	10	325
CPE1815-B	18,000	51,000	10.6	15	325
CPE2405-B	23,600	17,000	10.6	5	350
CPE2410-B	23,600	34,000	10.6	10	350
CPE2415-B	23,600	51,000	10.6	15	350
CPE3010-B	27,500	34,000	10.6	10	360
CPE3015-B	27,500	51,000	10.6	15	360



ELECTRICAL DATA

MODEL	VOLTAGE	COMPRESSOR		INDOOR BLOWER MOTOR		OUTDOOR FAN MOTOR		TOTAL AMPS	MINIMUM CIRCUIT AMPACITY	MAXIMUM OVERCURRENT PROTECTOR
		RLA	FLA	HP	FLA	HP	FLA			
CPE1205-B	208-230/60/1	4.6	33.0	1/3	2.3	1/4	1.5	24.2	30.3	35
CPE1210-B	208-230/60/1	4.6	33.0	1/3	2.3	1/4	1.5	46.0	57.5	60
CPE1805-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.5	24.2	30.3	35
CPE1810-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.5	46.0	57.5	60
CPE1815-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.8	67.8	84.6	90
CPE2405-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	24.2	30.3	35
CPE2410-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	46.0	57.5	60
CPE2415-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	67.8	84.6	90
CPE3010-B	208-230/60/1	11.1	78.0	1/3	2.3	1/4	1.8	46.0	57.5	60
CPE3015-B	208-230/60/1	11.1	78.0	1/3	2.3	1/4	1.8	67.8	84.6	90

OPTIONAL ACCESSORIES


MODEL	DESCRIPTION
CPWS	WALL SLEEVE (UNASSEMBLED)
CPWSA	WALL SLEEVE ADAPTER (UNASSEMBLED)
CPLG	ARCHITECTURAL LOUVER (ALUMINUM CLEAR ANODIZED)
CPLG-P	ARCHITECTURAL LOUVER- ALUMINUM PAINTED
-BD (CALL FOR DETAILS)	SECONDARY DRAIN PAN
-BP (CALL FOR DETAILS)	OMITED STAMPED LOUVER AND GRILLE
-BB (CALL FOR DETAILS)	COMBINATION OF (-BD) AND (-BP) SEE ABOVE

Note:All Specifications are subject to change without notification.




HEATING & AIR CONDITIONING EQUIPMENT


539 Dunksferry Road Bensalem, PA 19020
(800) 523-7138 • FAX: (215) 639-1674
www.nationalcomfortproducts.com

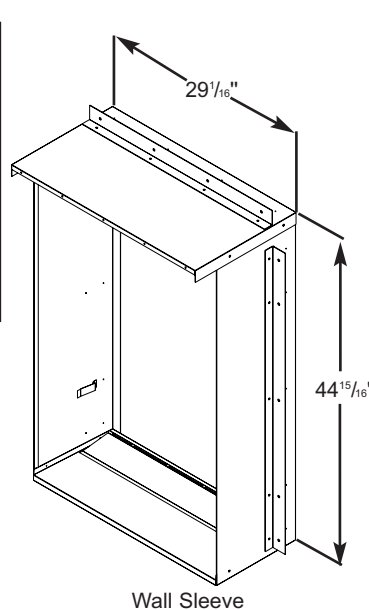

Wall Sleeve

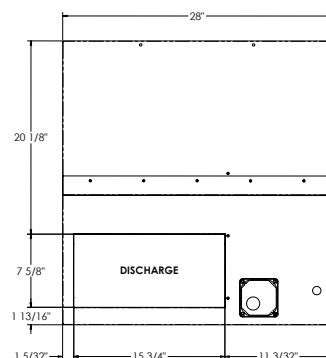

CPE Top View

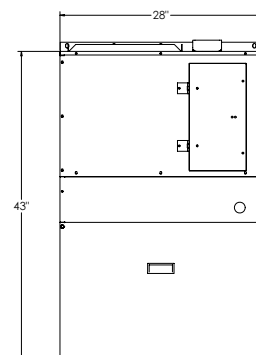

CPE Front View

CPE507