

COMFORT PACK CPG-D series

Gas Heat - Electric Cooling

FEATURES

- Self-Contained Heating and Cooling Units
- Easily Reachable Cooling Access Ports
- Precharged and Prewired
- Slide Out Chassis
- Polarized Molex Plug Connections on Cooling Chassis
- Supplied with Pre-Painted Stamped Exterior Grille
- 16" x 25" Filter Included (non washable)

COOLING SYSTEM

- R-410A High Efficiency Compressor
- Copper Tube with Enhanced Aluminum Fin Coils
- 1, 1.5, 2 and 2.5 Ton Cooling Capacities
- DC Indoor Motor

HEATING

- 80% Thermal Efficiency, Serpentine Design Heat Exchanger
- Up to 51,000 BTUH Heating Capacity Output
- Direct Spark Ignition with Unique, Single Gas Orifice
- Easy View Sight Glass for Diagnostic Lights and Flame
- Diagnostic LEDs Visible Through Furnace Door
- Control Board Mounted Out of the Way
- Sealed Combustion Chamber



Thru-the-Wall Comfort Pack units with heating capacities up to 64,000 Btuh. Cooling capacities from 1 to 2.5 tons.



Perfect for: condominiums, apartments, retirement villages and other multi-family construction.

WE GO THRU-THE-WALL™

COMFORT PACK Gas Heating - Electric Cooling

CPG - ELECTRICAL DATA

MODEL	VOLTAGE	COMPRESSOR		INDOOR BLOWER MOTOR			OUTDOOR FAN MOTOR			TOTAL AMPS	MINIMUM CIRCUIT AMPACITY	MAXIMUM OVERCURRENT PROTECTOR
		RLA	LRA	HP	FLA	LRA	HP	FLA	LRA			
CPG41238-D	208-230/60/1	5.5	26.0	1/3	3.0	-	1/4	1.8	3.6	8.6	12.0	15
CPG41838-D	208-230/60/1	8.3	44.0	1/3	3.0	-	1/4	1.8	3.6	13.1	14.7	20
CPG41851-D	208-230/60/1	8.3	44.0	1/3	3.0	-	1/4	1.8	3.6	13.1	14.7	20
CPG41864-D	208-230/60/1	8.3	44.0	1/3	3.0	-	1/4	1.8	3.6	13.1	14.7	20
CPG42438-D	208-230/60/1	9.5	58.0	1/3	3.0	-	1/4	1.8	3.6	15.1	17.0	25
CPG42451-D	208-230/60/1	9.5	58.0	1/3	3.0	-	1/4	1.8	3.6	15.1	17.0	25
CPG42464-D	208-230/60/1	9.5	58.0	1/3	3.0	-	1/4	1.8	3.6	15.1	17.0	25
CPG43051-D	208-230/60/1	11.6	74.0	1/3	3.0	-	1/4	1.8	3.6	16.4	22.0	30
CPG43064-D	208-230/60/1	11.6	74.0	1/3	3.0	-	1/4	1.8	3.6	16.4	22.0	30

CPG - PERFORMANCE DATA

MODEL	COOLING BTUH	HEATING INPUT	HEATING OUTPUT*	EER (outside temp.)	Thermal Efficiency	SHIP WT.
				95°		
CPG41238-D	12,000	38,000	30,400	9.0	80%	315
CPG41838-D	18,000	38,000	30,400	9.0	80%	325
CPG41851-D	18,000	51,000	40,800	9.0	80%	325
CPG41864-D	18,000	64,000	51,200	9.0	80%	325
CPG42438-D	22,400	38,000	30,400	9.0	80%	350
CPG42451-D	22,400	51,000	40,800	9.0	80%	350
CPG42464-D	22,400	64,000	51,200	9.0	80%	350
CPG43051-D	27,400	51,000	40,800	9.0	80%	360
CPG43064-D	27,400	64,000	51,200	9.0	80%	360

* Can be derated.


OPTIONAL ACCESSORIES

CPWS	WALL SLEEVE (UNASSEMBLED)
CPWSA	WALL SLEEVE ADAPTOR (UNASSEMBLED)
CPLG	ARCHITECTURAL LOUVER GRILLE
CPLG-S	ARCHITECTURAL LOUVER FOR SLEEVE
CPLG-P	ARCHITECTURAL LOUVER GRILLE (PAINTED)
CPLG-SP	ARCHITECTURAL LOUVER FOR SLEEVE (PAINTED)
PAINTED LOUVER	STAMPED GRILLE (PAINTED)
-DF (CALL FOR DETAILS)	SLOTTED FILTER DOOR
-DD (CALL FOR DETAILS)	SECONDARY DRAIN PAN
-DP (CALL FOR DETAILS)	OMITED STAMPED LOUVER AND GRILLE
-DB (CALL FOR DETAILS)	COMBINATION OF (-DD) AND (-DP) SEE ABOVE CONSULT FACTORY FOR OTHER COMBINATIONS
LP GAS LIT (30 MBH)	14208343 FOR 30 MBH OUTPUT
LP GAS LIT (40 MBH)	14208344 FOR 40 MBH OUTPUT
LP GAS LIT (51 MBH)	14208345 FOR 51 MBH OUTPUT

Note: All specifications are subject to change without notice.

COMFORT PACK AIR FLOW

MODEL	Ton	HP	Static			
			0.1	0.2	0.3	0.4
CPG412	1	1/3	400	380	362	344
CPG418	1.5	1/3	650	618	588	559
CPG424	2	1/3	715	680	647	615
CPG430	2.5	1/3	820	780	740	700

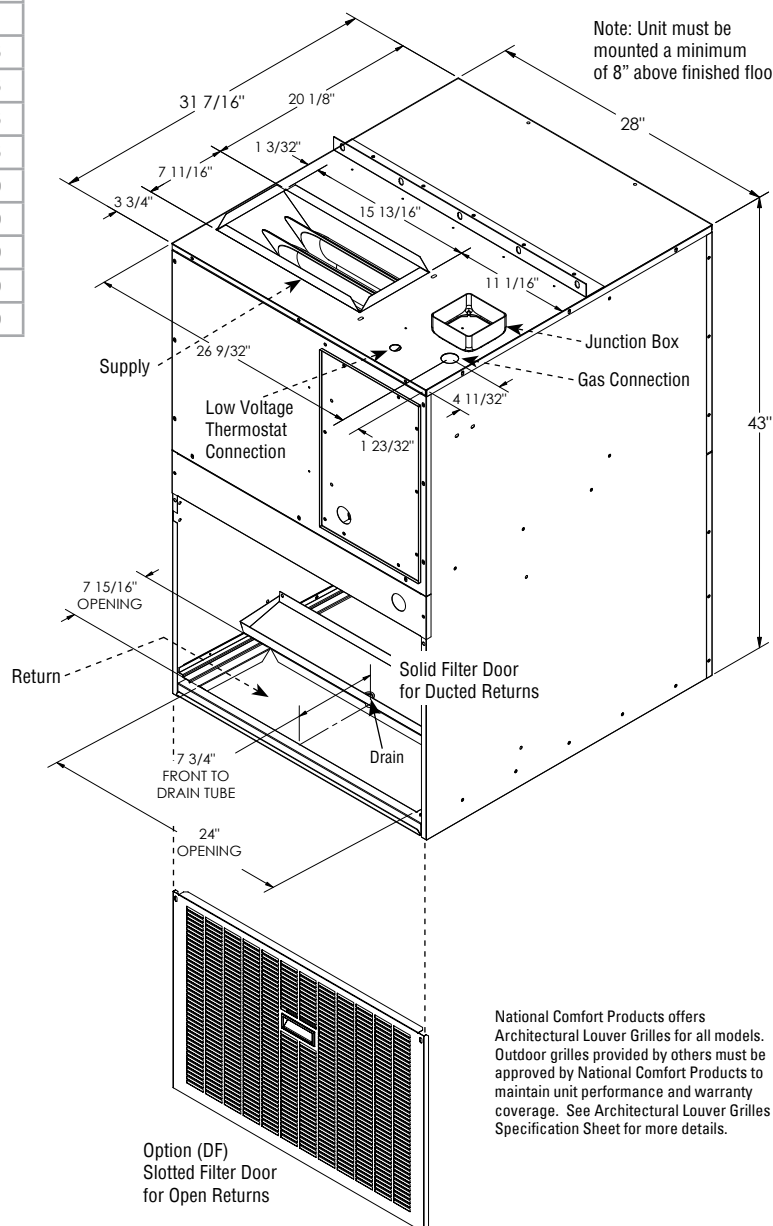

National Comfort Products offers Architectural Louver Grilles for all models. Outdoor grilles provided by others must be approved by National Comfort Products to maintain unit performance and warranty coverage. See Architectural Louver Grilles Specification Sheet for more details.



A Division of National Refrigeration and Air Conditioning Products, Inc.
539 Dunksferry Road • Bensalem, PA 19020
(800) 523-7138 • Phone (215) 244-1400
Fax (215) 639-1674
www.nationalcomfortproducts.com

CPG-D-R410A-02-25-2015