



COMFORT PACK T SERIES
with up to 95% GAS HEAT

Go Thru-the-Wall



Multi-Family Thru-the-Wall Heating & Cooling

Features


- Adjustable 5 Speed DC Indoor Motor
- Self-Contained Heating and Cooling Unit
- Precharged and Prewired
- Ships with standard Pre-Painted Stamped Exterior Grille (Pictured right)
- 20" x 25" Filter Included

Cooling System

- Slide-Out T-Series Cooling Chassis provided with polarized molex plug connections
(The T-Series chassis will only fit T-Series model cabinets)
- Easy Access Coremax Service Ports
- R-410A High Efficiency Compressor
- 2.5 Ton Cooling Capacities
- TXV installed in all models for optimum performance
- Standard Secondary Drain Connection

Heating

- Up to 95% AFUE Gas Efficiency
- Slide-Out Furnace with 409 Stainless Steel Heat Exchanger
- Up to 46,500 BTUH Heating Capacity Output
- Diagnostic LEDs and flame visible through sight glass on Furnace Door

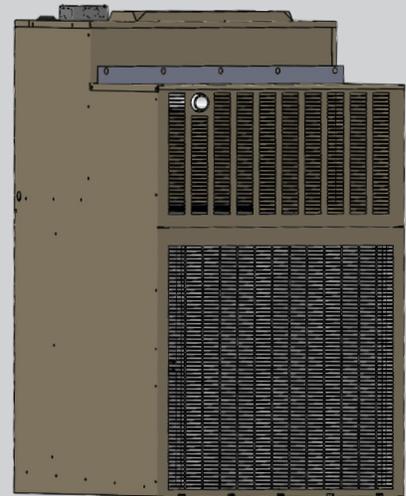

Comfort Pack

Shown with Factory Installed,
Pre-Painted Stamped Exterior Grille



**NATIONAL
COMFORT
PRODUCTS**

HEATING & A/C EQUIPMENT

National Comfort Products


A Division of National Refrigeration and Air Conditioning Products, Inc.

539 Dunksferry Road • Bensalem, PA 19020-5908

(800) 523-7138

www.nationalcomfortproducts.com

Nomenclature 2024

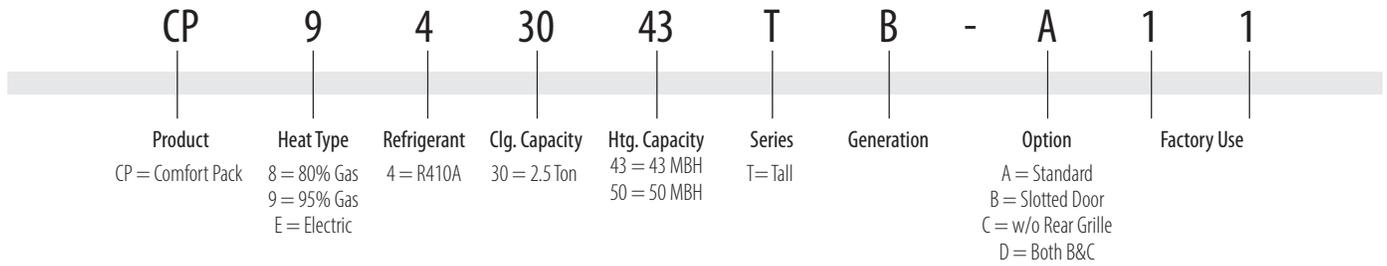

Performance Data

11.7 SEER2 – up to 95% AFUE								
Model	Nominal Cooling Tons	Cooling Btu/h	Sensible Btu/h	Charge R-410A (oz)	AFUE	Heater Input (Btu/h)	Heater Output (Btu/h)	Shipping Weight (lbs.)
CP943043TB	2.5	27,000	19,600	51	95%	43,000	40,850	365
CP943050TB	2.5	27,000	19,600	51	93%	50,000	46,500	365

Electrical Data

Model	Voltage	Compressor		Condenser Motor			Blower		Total Amps	MCA	MOP
		RLA	LRA	HP	RLA	LRA	HP	RLA			
CP943043TB	208/230-1-60	14.1	67.9	1/4	2.4	--	1/2	3.8	20.3	23.8	35
CP943050TB	208/230-1-60	14.1	67.9	1/4	2.4	--	1/2	3.8	20.3	23.8	35

Air Flow Data

Models	Color	Speed Tap	ESP (in. wc) / CFM				
			0.1	0.2	0.3	0.4	0.5
CP943043TB	Red	1	1000	975	950	930	910
	Yellow	2	840	830	800	775	750
	Blue	3	760	730	710	690	660
	Black	4	635	610	580	560	530
	Orange	5	520	430	375	310	-
CP943050TB	Red	1	1000	975	950	930	910
	Yellow	2	840	830	800	775	750
	Blue	3	760	730	710	690	660
	Black	4	635	610	580	560	530
	Orange	5	520	430	375	310	-

Other Options



CPWS	Wall Sleeve (Unassembled)
CPWSA	Wall Sleeve Adapter (Unassembled)
CPLGTX	T Series Architectural Louver Grille
CPLGTX-S	T Series Architectural Louver Grille for Sleeve
CPLGTX-P	T Series Architectural Louver Grille Painted
CPLGTX-SP	T Series Architectural Louver Grille for Sleeve Painted
CPSGTX-P	T Series Stamped Grille Painted
A	Standard
B	Slotted Door
C	without Rear Grille
D	Both B & C
14508008	43K LP Conversion Kit* (35,000 input)
	50K LP Conversion Kit

NOTE: National Comfort Products offers Architectural Louver Grilles for all models. Outdoor grilles provided by others must be approved by National Comfort Products to maintain unit performance and warranty coverage. See Comfort Pack Architectural Options Specification Sheet for more details.


Comfort Pack Advantages

- Up to 95% Efficient Slide Out Furnace with Stainless Steel Heat Exchanger
- Universal Cooling Chassis, Slides Out for Ease of Service
- Easy Access Refrigeration Service Ports Utilizing Low Loss Coremax Technology
- Polarized Molex Plugs Allowing for Simple Disconnect from Cabinet
- Secondary Drain Provides Built in Condensate Overflow Protection


Unit Dimensions

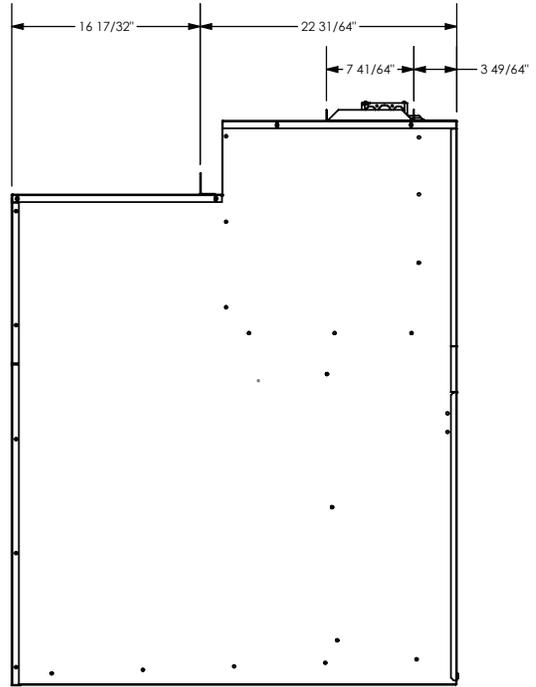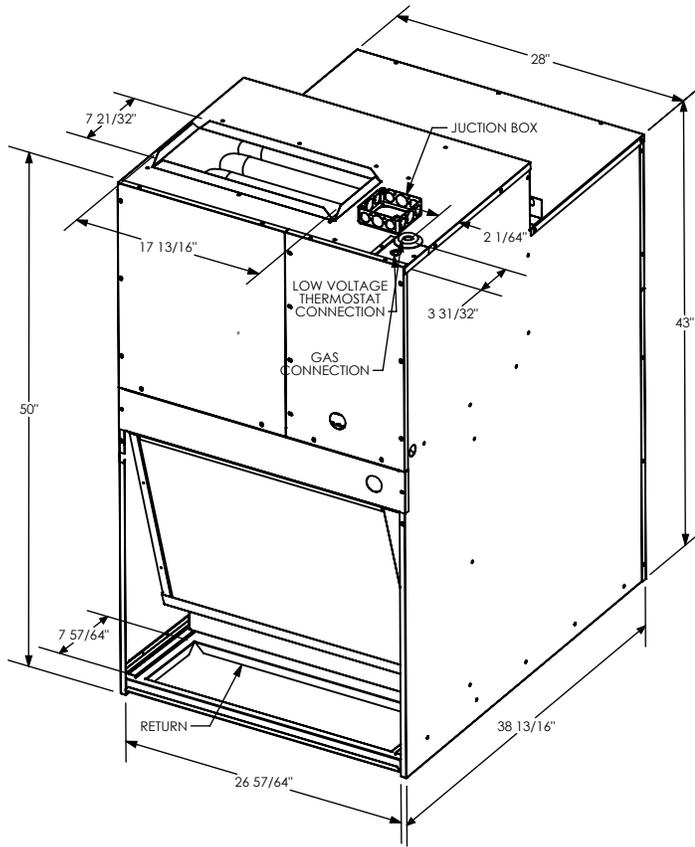

Side view



Standard Filter Door



Option (B)
Slotted Filter Door
for Open Returns

NOTE: Unit must be mounted a minimum of 8 inches above finished floor. See installation guide for vent termination clearances



National Comfort Products
A Division of National Refrigeration and Air Conditioning Products, Inc.
539 Dunksferry Road • Bensalem, PA 19020-5908
(800) 523-7138
www.nationalcomfortproducts.com



All specifications are subject to change without notice.

Spec Comfort Pack with up to 95% Gas Heat T Series 2024