



National Comfort Products

Thru-the-Wall with **R-32**


When Taking Care of the Customer Comes First.

*We're always expanding our product line to deliver what you need — when you need it. That's why we now offer our Thru-the-Wall Condensing Units with an **R-32** option in both the 1000 and 3000 Series. It's the same product you trust, now with more choices to make your job easier.*

Thru-the-Wall Condensing Units

1000 | 3000 Series

R-32

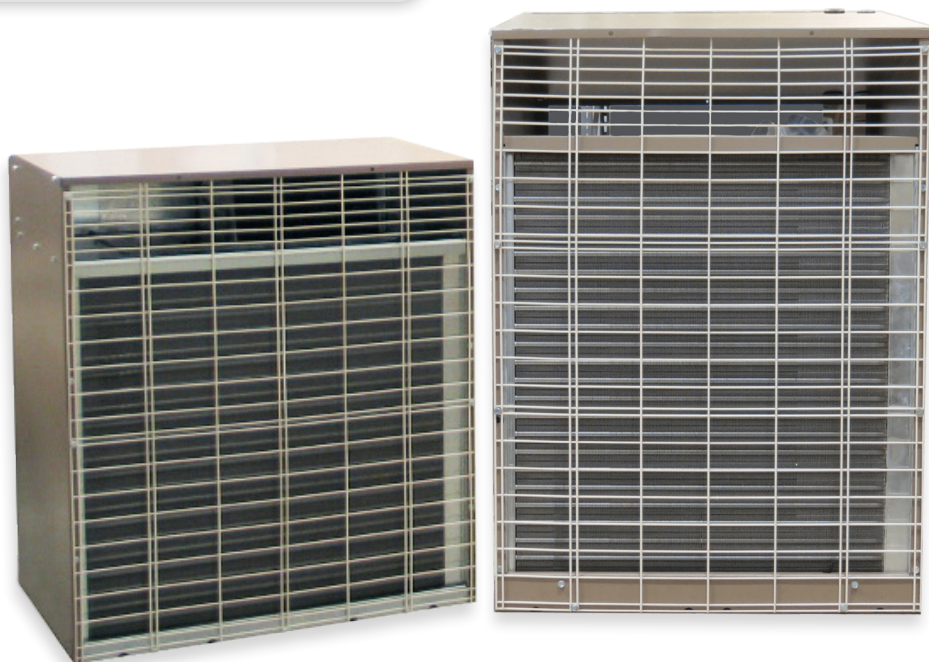

Go Thru-the-Wall





NCP - Condensing Unit Electrical & Dimensional Data

1000 Series R-32

All Units 208/230-1-60Hz

| Model | Shipping weight (lbs) | Compressor | | MCA | MOP |
|-----------------------|-----------------------|-----------------------------------|---------------|---------------------------|------|
| | | RLA | LRA | | |
| NCP3181000A-** | 157 | 8.3 | 44.3 | 11.7 | 15 |
| NCP3241000A-** | 162 | 10.3 | 59.3 | 14.2 | 20 |
| NCP3301000A-** | 167 | 11.5 | 66.3 | 16.2 | 25 |
| Cond. Fan Motor Specs | | 418/424 | | 1/4 HP, 1600 RPM, 1.3 FLA | |
| | | 430 | | 1/5 HP, 1650 RPM, 1.8 FLA | |
| Condenser Coil Specs | | 3.61 ft2 Face Area, 16 FPI | | | |
| Dimensions | | 26 1/4" W x 28 5/8" H x 18 1/2" D | | | |
| Liquid Valve | | 3/8" | Suction Valve | | 3/4" |

** This unit is charged with only 3.75 lbs of R-32. The installer must add charge to meet the required subcooling value provided in the installation manual.

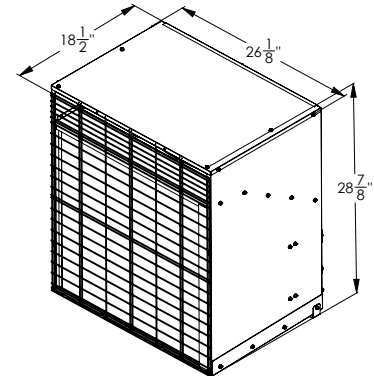
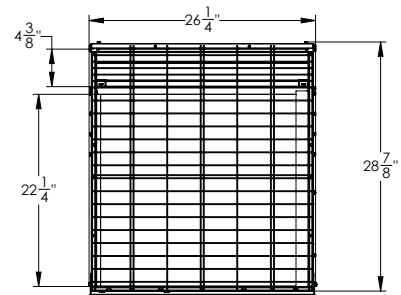

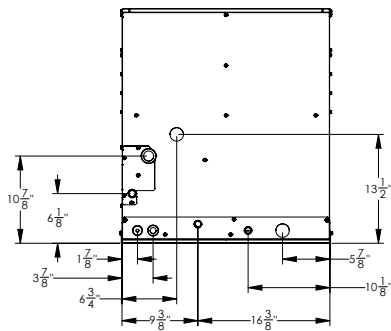


3000 Series R-32

All Units 208/230-1-60Hz

| Model | Shipping Weight (lbs) | Compressor | | MCA | MOP |
|-----------------------|-----------------------|-------------------------------|---------------|---------------------------|------|
| | | RLA | LRA | | |
| NCP3183000A-** | 157 | 8.3 | 44.3 | 11.7 | 15 |
| NCP3243000A-** | 162 | 10.3 | 59.3 | 14.2 | 20 |
| NCP3303000A-** | 167 | 11.5 | 66.3 | 16.2 | 25 |
| Cond. Fan Motor Specs | | 418/424 | | 1/4 HP, 1600 RPM, 1.3 FLA | |
| | | 430 | | 1/5 HP, 1650 RPM, 1.8 FLA | |
| Condenser Coil Specs | | 3.77 ft2 Face Area, 16 FPI | | | |
| Dimensions | | 24 1/8" W x 32" H x 18 1/2" D | | | |
| Liquid Valve | | 3/8" | Suction Valve | | 3/4" |

** This unit is charged with only 3.75 lbs of R-32. The installer must add charge to meet the required subcooling value provided in the installation manual.

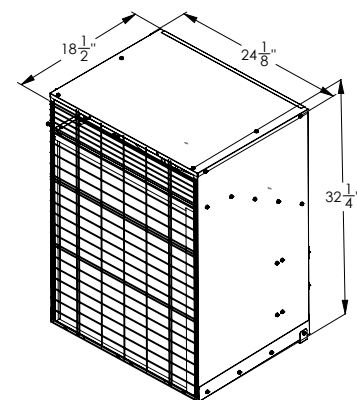

Note: Some dimensions that are shown in these drawings are measured between the edges of screw heads.

*Product also available with R454B.