

NATIONAL COMFORT PRODUCTS

HEATING & AIR CONDITIONING EQUIPMENT

COMFORT-PACK GAS HEATING - ELECTRIC COOLING



"CPG" SERIES

FEATURES

- Totally Self-Contained Heating & Cooling Units
- 1 Ton thru 2½ Ton Capacity Cooling
- Up to 51,000 BTUH Heating Capacity Output
- Easy Access Service Ports
- Completely Precharged and Prewired
- Totally Polarized Electrical Plug Connections on Cooling Chassis
- No Long Refrigerant Lines
- Separately Metered
- Cleaner Appearance
- Slide Out Cooling Chassis
- Easier Installation

COOLING SYSTEM

- High Efficiency Compressor
- Copper Tube with Enhanced Aluminum Fin Coils
- Permanently Lubricated High Efficiency PSC Blower Motor

HEATING SYSTEM

- 80% AFUE Industrial Quality Serpentine Design Heat Exchanger
- Aluminized Titanium Stabilized Steel Heat Exchanger
- Direct Spark Ignition with Unique Single Gas Orifice
- Easy View Sight Glass for Diagnostic Lights and Flame

"CPG" SERIES

COMFORT PACK GAS HEATING - ELECTRIC COOLING



PERFORMANCE DATA

MODEL	COOLING BTUH	HEATING INPUT	HEATING OUTPUT	SEER	AFUE	SHIP WT.
CPG1238-B	12,000	38,000	30,000	10.6	80%	315
CPG1838-B	18,000	38,000	30,000	10.6	80%	325
CPG1851-B	18,000	51,000	40,000	10.6	80%	325
CPG1864-B	18,000	64,000	51,000	10.6	80%	325
CPG2438-B	23,600	38,000	30,000	10.6	80%	350
CPG2451-B	23,600	51,000	40,000	10.6	80%	350
CPG2464-B	23,600	64,000	51,000	10.6	80%	350
CPG3051-B	27,500	51,000	40,000	10.6	80%	360
CPG3064-B	27,500	64,000	51,000	10.6	80%	360


ELECTRICAL DATA

MODEL	VOLTAGE	COMPRESSOR		INDOOR BLOWER MOTOR		OUTDOOR FAN MOTOR		TOTAL AMPS	MINIMUM CIRCUIT AMPACITY	MAXIMUM OVERCURRENT PROTECTOR
		RLA	LRA	HP	FLA	HP	FLA			
CPG1238-B	208-230/60/1	4.6	33.0	1/3	2.3	1/4	1.5	7.1	8.3	15
CPG1838-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.5	10.8	13.09	20
CPG1851-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.5	10.8	13.09	20
CPG1864-B	208-230/60/1	7.0	41.0	1/3	2.3	1/4	1.5	10.8	13.09	20
CPG2438-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	13.5	16.64	25
CPG2451-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	13.5	16.64	25
CPG2464-B	208-230/60/1	9.9	61.0	1/3	2.3	1/4	1.8	13.5	16.64	25
CPG3051-B	208-230/60/1	11.1	78.0	1/3	2.3	1/4	1.8	15.5	18.12	30
CPG3064-B	208-230/60/1	11.1	78.0	1/3	2.3	1/4	1.8	15.5	18.12	30

OPTIONAL ACCESSORIES

MODEL	DESCRIPTION
CPWS	WALL SLEEVE (UNASSEMBLED)
CPWSA	WALL SLEEVE ADAPTER (UNASSEMBLED)
CPLG	ARCHITECTURAL LOUVER (ALUMINUM CLEAR ANODIZED)
CPLG-P	ARCHITECTURAL LOUVER- ALUMINUM PAINTED
-BD (CALL FOR DETAILS)	SECONDARY DRAIN PAN
-BP (CALL FOR DETAILS)	OMITED STAMPED LOUVER AND GRILLE
-BB (CALL FOR DETAILS)	COMBINATION OF (-BD) AND (-BP) SEE ABOVE
LP GAS KIT (30 MBH)	14208343 FOR 30 MBH OUTPUT
LP GAS KIT (40 MBH)	14208344 FOR 40 MBH OUTPUT
LP GAS KIT (51 MBH)	14208345 FOR 51 MBH OUTPUT

Note: All Specifications are subject to change without notification.

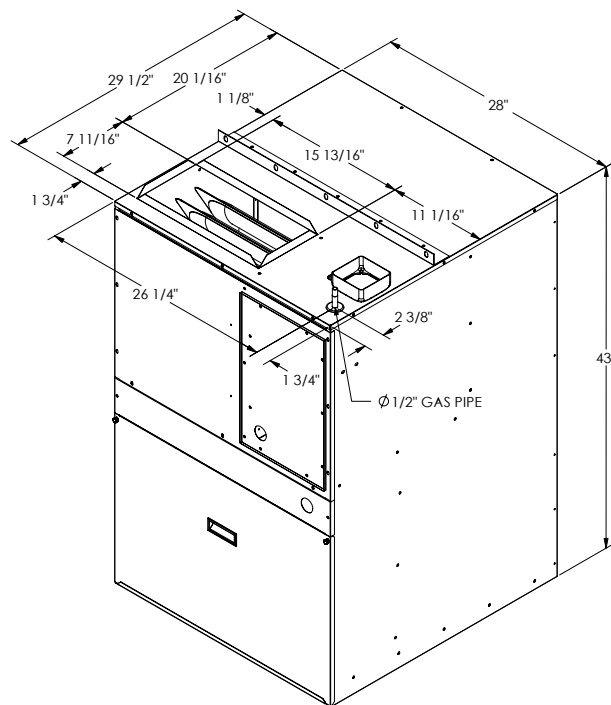

539 Dunksferry Road Bensalem, PA 19020
(800) 523-7138 • FAX: (215) 639-1674
www.nationalcomfortproducts.com